


PowerWalker AS/400 Card

AS/400 Card

Provides contact closure for monitoring UPS

Offer different dry-contacts

Suitable for IBM server, Personal PC and workstations equipment's, auto-controlled industrial equipment and communication applications.

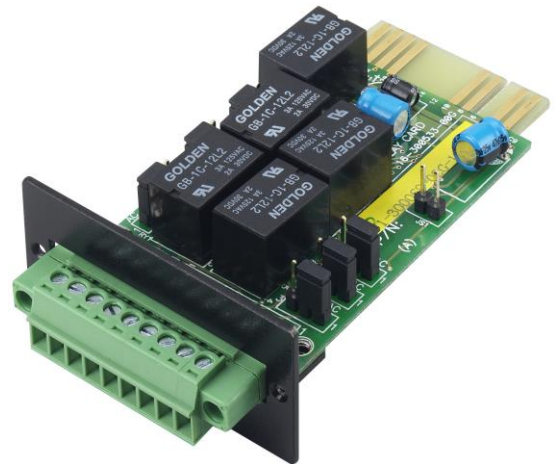

Item-No. 10120515


The PowerWalker AS/400 communication card provides contact closures for remote monitoring of your UPS. To meet different application requirement, the AS/400 card is capable of selection the status of the dry-contact signal (active close or active open) by setting jumper.

Product Features


For more details download see manual on our website

Supports following models:

- VFI 1000C, 2000C, 3000C, 6000C, 10000C LCD
- VFI 1000, 1500, 2000, 3000 LCD
- VFI 1000RM, 1500RM, 2000RM, 3000RM LCD
- VFI 6000R, 10000R LCD
- VFI 10000CP, 15000CP, 20000CP, 30000CP 3/3



Pin Assignment	Function	I/O
Pin 1	UPS Failure	O/P
Pin 2	UPS Audible Alarm	O/P
Pin 3	GND (Common for Pin 4)	Power Ground
Pin 4	Remote Shutdown	I/P
Pin 5	Common for relays	Power Supply
Pin 6	Bypass Active	O/P
Pin 7	Low Battery	O/P
Pin 8	UPS On	O/P
Pin 9	Utility Failure	O/P

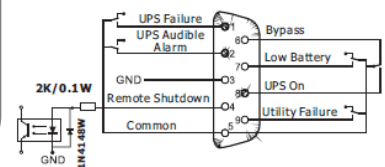

Technical Details

Specifications

Suitable Application	IBM Server, Personal PC & Workstations equipment, Auto-controlled industrial equipment & communication applications
Communication Port	9 PIN Port
Product Details	
Dimensions	85mm x 52mm x 26mm (D x W x H)
Colour	Black
Weight	34.7g
Model Code	AS-400 card

Environment

Temperature	0°C – 40°C
Humidity	0 - 95% RH (non- condensing)

Logistic Data

Item Number	10120515
EAN Code	4260074974300
Warranty	24 Months

Version: EN 25/09/2014

We reserve the right for technical changes and mistakes