

PowerWalker VFD 800 APFC/FR

Standby/Off-Line UPS System

800VA Off-Line UPS

Excellent Solution for APFC Equipment


6x French outlets, RJ11/RJ45 Surge Protection

LED Indicator, Cold start

Auto restart while AC is recovering



Item-No. 10120413

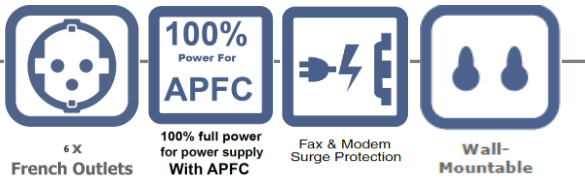

Product Features


PowerWalker VFD 800 APFC/FR is a Standby/Off-Line UPS for home and office applications and is equipped with a technique, that allows using the full power of UPS, even when used with APFC power supply load. Usually it is required to oversize a UPS to ensure secure backup when connecting an APFC power supply. With the implemented new technology this is not needed. Connecting same APFC load it's now possible to choose smaller cost-effective UPS (e.g. PowerWalker VFD 800 APFC/FR instead of usual offline or line interactive 1500 VA model). Besides the lower purchase price it also saves energy cost due to it lower own power consumption.

Equipped with 6 French-Type outlets (all with surge protection, 4 with battery backup) these models can be used like a power strip. A special battery compartment enables an easy exchange of the rechargeable battery by the user.

- Excellent Solution for APFC Equipment
- Supporting Full Rating APFC Equipment
- Wall-mountable
- High Frequency Technology Design
- Quick Installation & Easy Operation
- Easy User-replaceable Battery Design
- Auto restart while AC is recovering
- Cold start function
- RJ11/RJ45 surge protection
- Green function for energy saving



Backsite view

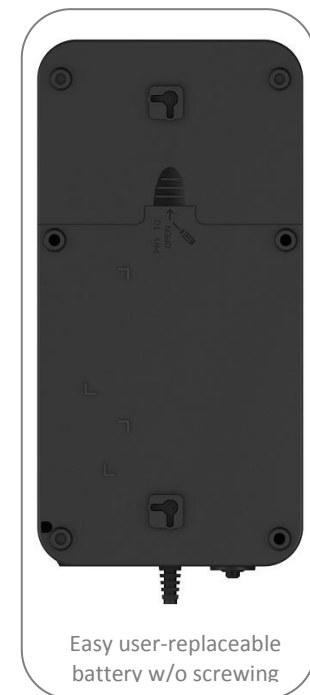

Easy user-replaceable battery w/o screwing

Technical Details

Product Features

Capacity	800VA / 420W
Input Voltage	220/230/240VAC
Input Voltage Range	170-280VAC
Output Voltage	220/230/240VAC
Voltage Regulation (Battery Mode)	+/- 10%
Output Frequency	50Hz or 60Hz
Frequency Regulation (Battery Mode)	+/- 1Hz
Output Waveform	Simulated Sine wave
Typical Transfer Time	2-8ms
Battery	
Type	12V / 7Ah
Quantity	1x
Recharge Time	10h for 90%
LED Indicators	
AC Mode	Green LED
Battery Mode	Green LED flashing (5sec interval)
Low Battery	Green LED flashing (1sec interval)
Fault	RED LED
Over load	RED LED flashing (1sec interval)
Audio Indicators	
Battery Mode	Beep every 5sec
Low Battery	Beep every second
Fault	Continuous Beep
Over load	Beep every 0.5sec

Connections

Outlets	6x French (4x battery protected)
Surge Protection	RJ11/RJ45 (in/out)

Product Details

Dimensions	335 x 92 x 170 mm
Colour	Black
Weight	3.6kg
Model Code	VFD 800 APFC/FR

Environment

Temperature	0°C – 40°C
Humidity	0% - 85% (non- condensing)

Package Content

Package Content	PowerWalker VFD 800 APFC/FR, manual
------------------------	-------------------------------------

Logistic Data

Giftbox Language	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/SR
Manual Language	EN/DE/FR/PL
Dimension/Giftbox	405 x 166 x 248 mm
Weight/Giftbox	4.0kg
Dimension/Carton	420 x 351 x 521 mm
Weight/Carton	18.0kg
Pieces/Carton	4pcs
Pieces/Palette	72pcs
Item Number	10120413
EAN	4260074976229
Warranty	24 Months (except battery)

Available accessories



Yuasa 12V/7Ah battery
 Datasheet: [Link](#)
 CSB or Panasonic brand can also be used



Yuasa 12V/9Ah battery
 Datasheet: [Link](#)
 CSB or Panasonic brand can also be used



ATS (Automatic Transfer Switch)
 Datasheet: [Link](#)
 Item No.: 10120543



19" MBS
 Maintenance Bypass Switch
 Datasheet: [Link](#)
 Item No.: 10120501



MBS (Maintenance Bypass Switch)
 Datasheet: [Link](#)
 Item No.: 10120500



Schuko Input -> IEC C13
 Item Nr.: 91010017



UK Input -> IEC C13
 Item Nr.: 91010029

Swiss Input -> IEC C13



IEC C13 -> IEC C14
 Item Nr.: 91010013



Schuko Input -> IEC C19
 Item Nr.: 91010018



UK Input -> IEC C19
 Item Nr.: 91010030

Swiss Input -> IEC C19



IEC C19 -> IEC C20
 Item Nr.: 91010028



IEC C13 -> IEC C20
 Item Nr.: 91010041



IEC C14 -> IEC C19
 Item Nr.: 91010040



IEC C14 -> Schuko
 Converter
 Item Nr.: 91015003



Schuko -> UK adaptor
 Item Nr.: 91010031